

TPA20


Product

Aquafloor

Pre Grooved 22mm Chipboard Underfloor Heating System



thermotec

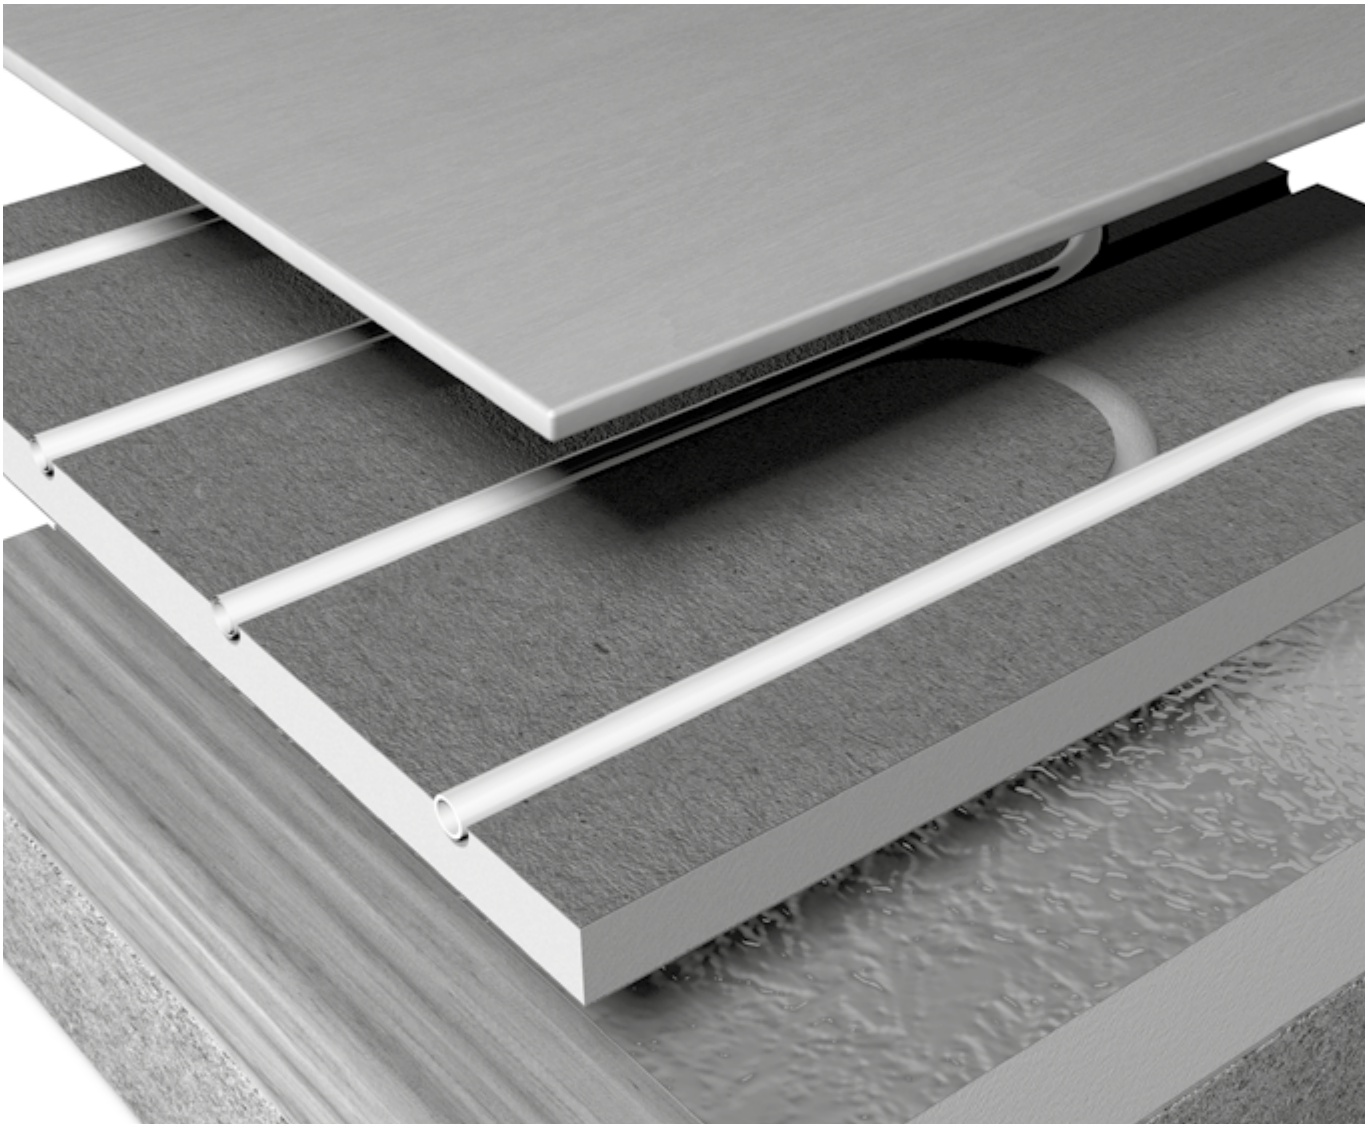

Contact

thermotec


Southpoint, Compass Park,
Bodiam, Robertsbridge
TN32 5BS

thermotecuk.com





Pre Grooved 22mm Chipboard Underfloor Heating System

For Overlay of Suspended Timber Sub-floors

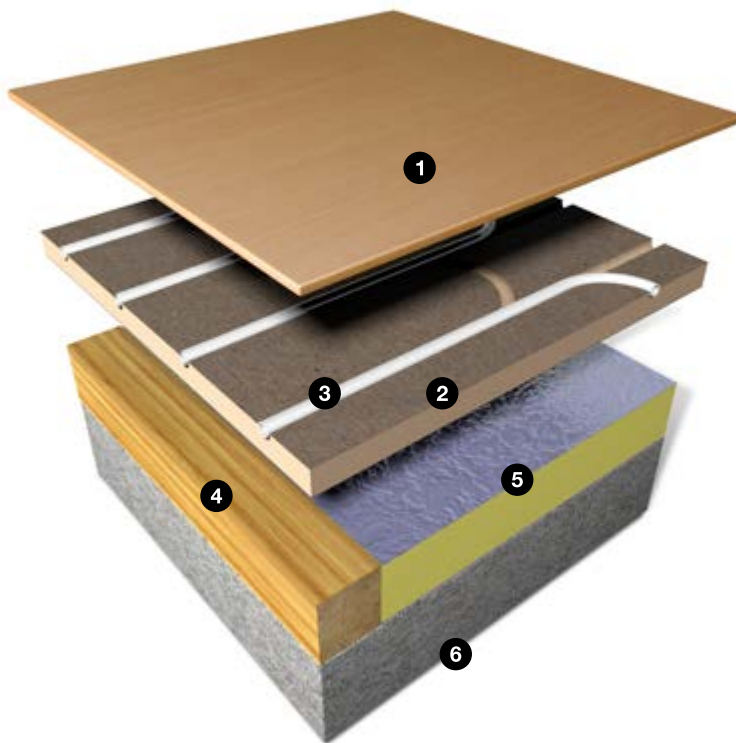

TYPICAL SECTION

- 1 Timber floor finish or min 6mm ply for alternative floor finish
- 2 22mm Pre-Grooved Chipboard
- 3 Aquafloor Heating pipe, 12mm diameter
- 4 Floor joist
- 5 Insulation
- 6 Timber or solid sub-floor

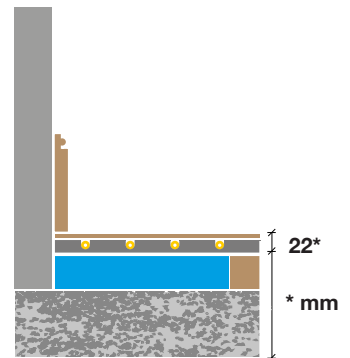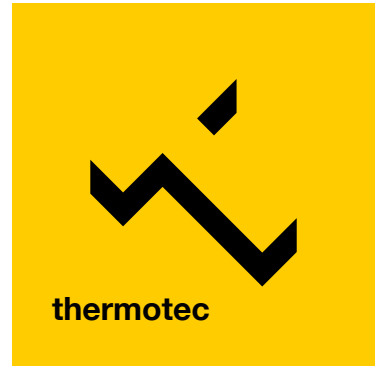

Heat output of up to
75 watts/m²

Suitable for laying on
solid and timber sub-floors

Ultra low construction
height

Choice of installation
thicknesses

Individual temperature
control in every room

***technical specifications
available on request**