


## Product

### Slimline V2 Thermostat



Product Dimensions (mm) & Wiring Specification

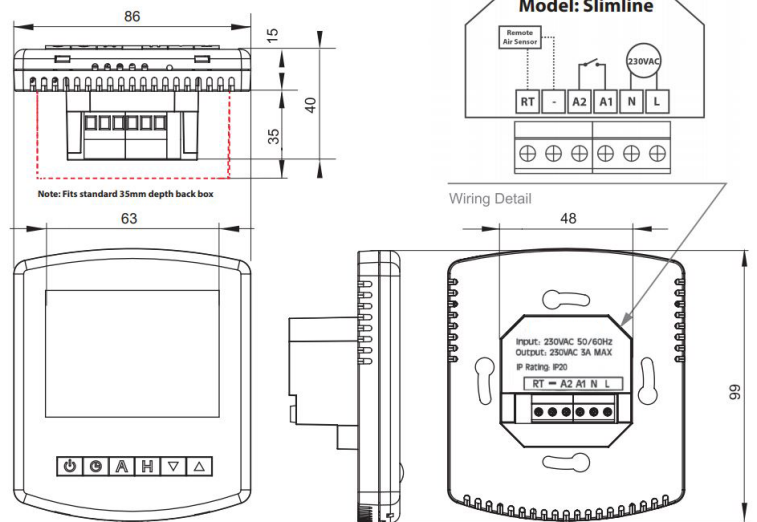

## Specifications

<b>Temp Range</b>	05-35°C 41-95°F
<b>White Back Lit Screen</b>	Y
<b>Non-Programmable</b>	Y
<b>5/2 Day Programming Mode</b>	Y
<b>7 Day Programming Mode</b>	Y
<b>Number of Heating Levels</b>	4
<b>Optimum Start</b>	Y
<b>Number of HW Times</b>	0
<b>Holiday Function</b>	Y
<b>Keylock Function</b>	Y
<b>Temperature Hold Function</b>	Y
<b>Temperature Override</b>	Y
<b>Temperature Override Limit</b>	Y
<b>Frost Protection</b>	Y
<b>Networking Facility</b>	N
<b>°C / °F Option</b>	Y
<b>Built in Sensor</b>	Y
<b>Remote Air Sensing Mode</b>	N
<b>Floor Sensing Mode</b>	N
<b>Remote Prode Included</b>	N
<b>Max Switching Current</b>	3A
<b>Accuracy</b>	+/-1°C
<b>Infrared Remote Control Option</b>	N
<b>Adjustable Switching Differential</b>	Y
<b>Supply</b>	230VAC
<b>Rating</b>	3A
<b>Installed Dimensions (L,H,D)</b>	99 x 86 x 15mm
<b>Weight</b>	195g

<b>Temperature Format</b>	00 = °C, 01 = °F (°C = Default)
<b>Switching Differential</b>	01° - 03° (Default 01°C)
<b>Frost Mode</b>	00 Enabled, 01 = Disabled (00=Default)
<b>Frost Protection Temperature</b>	07° - 17° (Default 12°C)
<b>Output Delay</b>	00-15 Minutes (00 = Default)
<b>Communications ID No.</b>	Not in use on this model
<b>Up/Down Temperature Limit</b>	00° - 10° (00 = Default)
<b>Sensor Selection</b>	00 = Built in Sensor 01 = Remote Air Sensor
<b>Floor Temperature Limit</b>	Not in use on this model
<b>Optimum Start</b>	00-03 Hours (00 = Default)
<b>Rate of Change</b>	Minutes to raise by 1°C
<b>Program Mode</b>	00 = Non-Programmable 01 = 5/2 Day 02 = Day

## Contact

### thermotec

Southpoint, Compass Park,  
Bodiam, Robertsbridge  
TN32 5BS

[thermotecuk.com](http://thermotecuk.com)

