
Product


Actuator Valve



Specifications

Electro-thermal actuators can be installed on on-off valves, like piston zone valves, or on cut out valves mounted on manifold outtakes. In general, they are controlled directly by a room thermostat that closes a contact, thus allowing the actuator to be fed. The system features an inner wax thermostat that, due to the effect of electric current, warms up and gets longer.

This forces the piston to move within the actuator and to drive the valve spindle closed or open. TE 3041 actuator features NC (normally closed) operation, so it keeps the valve closed through a spring when it is powered off. Supply voltage 24 V / 230 V.

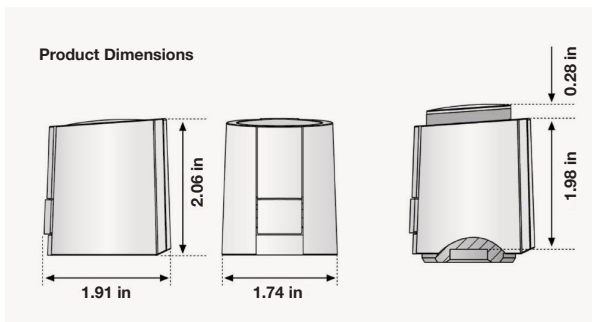

Version	Normally Closed (NC)
Operating Power	1W
Open/Close time	Approx. 3.5mm
Actuator Travel	4mm
Fluid Temperature	0-100°C

Storage Temperature	25-60°C
Protection Type	IP 54
Connecting Cable	2 x 0.75
CE conformity according to	EN 60730
Cable Length	1m (3.28ft) Voltage: 24v/230v

Contact

thermotec

Southpoint, Compass Park,
Bodiam, Robertsbridge
TN32 5BS

thermotecuk.com

