





**Product**

**Wireless Wiring Centre**  
UH 8-RF

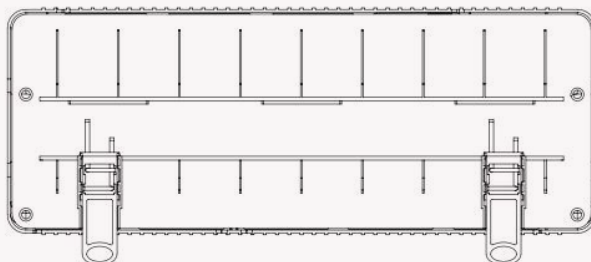

**Product Dimensions (mm)**

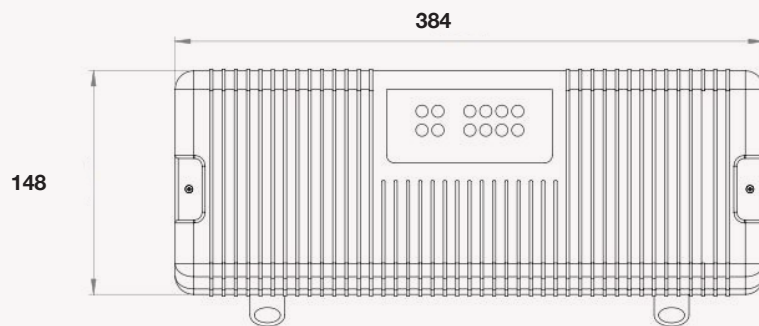

---

## Specifications

---

The UH8-RF is our 8 Zone wireless wiring centre designed to work with our Slimline-RF and neoAir Thermostats. The UH8-RF provides central switching and is therefore ideally situated next to the underfloor heating manifold. 8 zones can be controlled as well as providing an output for a hot water cylinder. On demand from any zone, a 230v output is provided to switch the relevant zone actuators, underfloor heating pump and valve. A volt free connection is supplied for the boiler, making it compatible with almost all types of boilers. The boiler signal can also be sent via RF to the RF Switch, providing the installer a totally wireless solution.

Up to 6 actuators can be connected to each zone. An external aerial is available for use when the UH8-RF is being mounted in a metal cupboard or when the wireless signal is restricted. A software option in the thermostat allows you to configure which zones are underfloor heating and which zones are radiators. Radiator zones will not enable the underfloor heating pump, valve and boiler when there is a call for heat. Radiator zones will not enable the underfloor heating pump, valve and boiler when there is a call for heat. Radiator zones should enable the boiler from the end switch of the valve.

---

<b>RF Switch</b>	Yes
<b>Boost Compatible</b>	Yes
<b>Slimline-RF Compatible</b>	Yes
<b>Touch-RF Compatible</b>	Yes
<b>Number of heating zones</b>	8
<b>Number of hot water zones</b>	1
<b>Neon Indication</b>	Yes
<b>DIN Rail Mounting</b>	Yes
<b>Supply</b>	230v AC 50Hz 1 Phase
<b>Relay Load Max</b>	3 Amp Resistive
<b>Total Load Max</b>	5 Amp Resistive
<b>IP Protection</b>	IP20
<b>Intalled Dimensions (L,H,D)</b>	384 x 148 x 60mm
<b>Weight</b>	1215g

---

## Contact

---

### **thermotec**

Southpoint, Compass Park,  
Bodiam, Robertsbridge  
TN32 5BS

**thermotecuk.com**

