


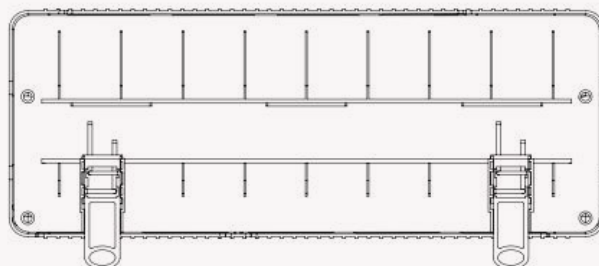


Product

Wiring Centre
UH8



Product Dimensions (mm)

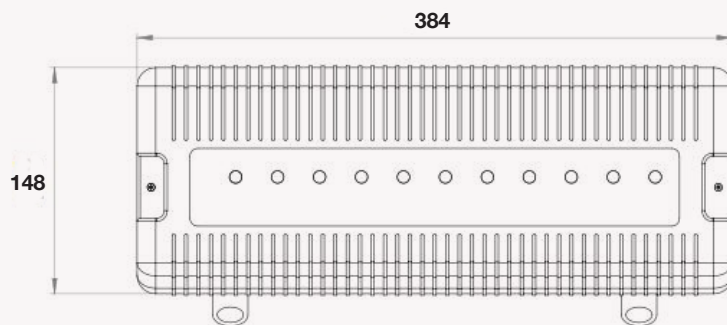

Specifications

The UH8 is designed to work with our 4 channel 230v time clock (TM4) and 230v Set back thermostat (DS-SB) but equally could be used with any 230v room thermostat. Up to 8 zones can be controlled from the UH8. On board the UH8 are two heating time channels, each zone allows you to specify which time channel it should follow. 2 additional time channel connections are provided for hot water control or other auxiliary devices. On demand from any zone, a 230v output is provided to switch the relevant zone actuator, underfloor heating pump and valve. A volt free connection is supplied for the boiler, making it compatible with almost all types of boilers.

A simple slide switch makes zone 8 suitable for controlling a radiator zone. When used for controlling radiators, zone 8 does not enable the underfloor heating pump, valve and boiler. Up to 4 actuators can be connected to each zone.

Number of heating zones	8
Number of Hot water zones	0
Neon Indication	Yes
DIN Rail Mounting	Yes
Supply	230v AC 50Hz 1 Phase
Relay Load Max	3 Amp Resistive
Total Load Max	5 Amp Resistive
IP Protection	IP20
Installed Dimensions (L,H,D)	384x148x60mm
Weight	850g

Contact

thermotec
Southpoint, Compass Park,
Bodiam, Robertsbridge
TN32 5BS

thermotecuk.com

